




HS 24

- ★ Drive position, suitable for highway and good road
- ★ Extra deep tread for long mileage and improved traction
- ★ M + S pattern with excellent grip, anti - wearing and anti - uneven wearing character.

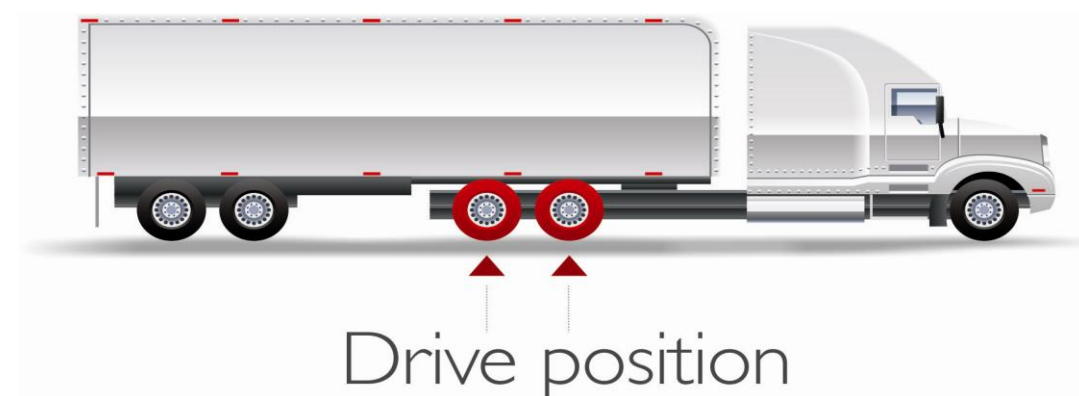

			(mm)	(mm)	single	dual	single	dual	(mm)		kg	label values				
SIZE	PLY RATING	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	MAX LOAD (KG)	MAX LOAD (KG)	PRESSURE (KPA)	PRESSURE (KPA)	TREAD DEPTH	LOAD AND SPEED INDEX	SECOND INDEX	WEIGHT	ROLLING RESISTANCE	WET GRIP	ROLLING NOISE	REMARK
12 R 22,5	16	9.00	304	1084	3350	3075	830	830	20,6	149/145 M		65,1	00	00	00	00
12 R 22,5	18	9.00	304	1084	3350	3250	930	930	20,6	152/149 M		65,1	00	00	00	00
11.00 R 20	16	8.00	286	1090	3270	2870	825	825	20,6	149/145 L		67,3	00	00	00	00
11.00 R 20	18	8.00	286	1090	3350	3250	930	930	20,6	152/149 L		67,3	00	00	00	00