




HS 28+

- ★ Drive position, suitable for highway and good road
- ★ Extra deep tread for long mileage and improved traction
- ★ M + S pattern with excellent grip, anti - wearing and anti - uneven wearing character.
- ★ Full depth groove provides excellent traction through the life of tread

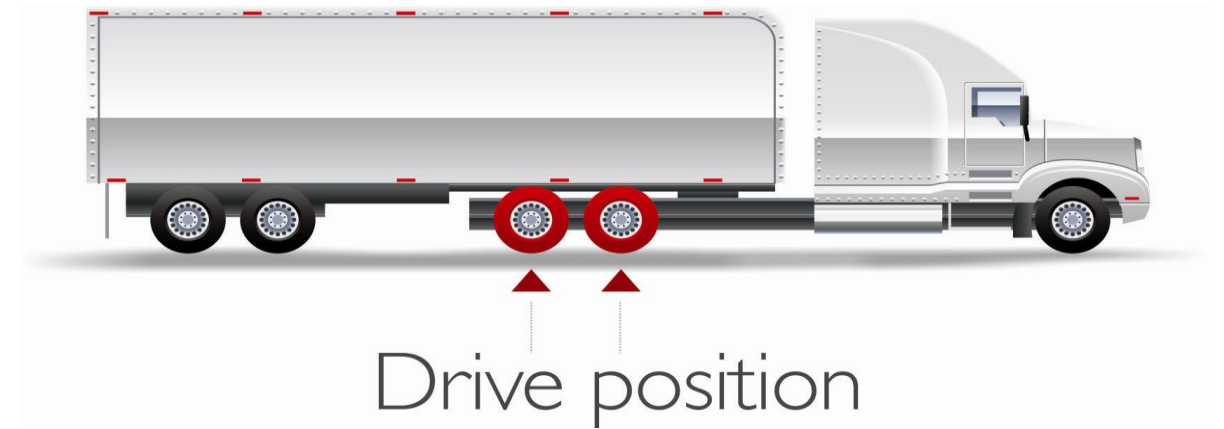

			(mm)	(mm)	single	dual	single	dual	(mm)			kg	label values			
SIZE	PLY RATING	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	MAX LOAD (KG)	MAX LOAD (KG)	PRESSURE (KPA)	PRESSURE (KPA)	TREAD DEPTH	LOAD AND SPEED INDEX	SECOND INDEX	WEIGHT	ROLLING RESISTANCE	WET GRIP	ROLLING NOISE	REMARK
11 R 22,5	14	8,25	277	1066	2800	2650	720	720	22,5	144/142 M		60,9	E	C	77)))	M + S
11 R 22,5	16	8,25	277	1066	3000	2725	840	770	22,5	146/143 M	148/145 L	61,9	E	C	77)))	M + S
12 R 22,5	16	9,00	304	1090	3350	3075	840	770	23	149/145 M		68,5	E	C	77)))	M + S
12 R 22,5	18	9,00	304	1090	3350	3250	930	930	23	152/149 M		68,5	E	C	77)))	M + S
315/70 R 22,5	18	9,00	312	1032	3450	3150	830	830	23	152/148 M	154/150 L	67,3	E	C	77)))	M + S
295/80 R 22,5	18	9,00	303	1060	3550	3250	900	900	22,5	152/148 M		64,7	E	C	77)))	M + S
315/80 R 22,5	18	9,00	315	1094	3750	3450	830	830	23	154/150 M	156/150 L	72,0	E	C	77)))	M + S