




HS 38

- ★ All position, for on/off road use
- ★ Suitable for mixed road and relative poor road surface
- ★ Excellent crack and tear resistance character
- ★ M + S pattern, low heat generating, excellent loading capacity

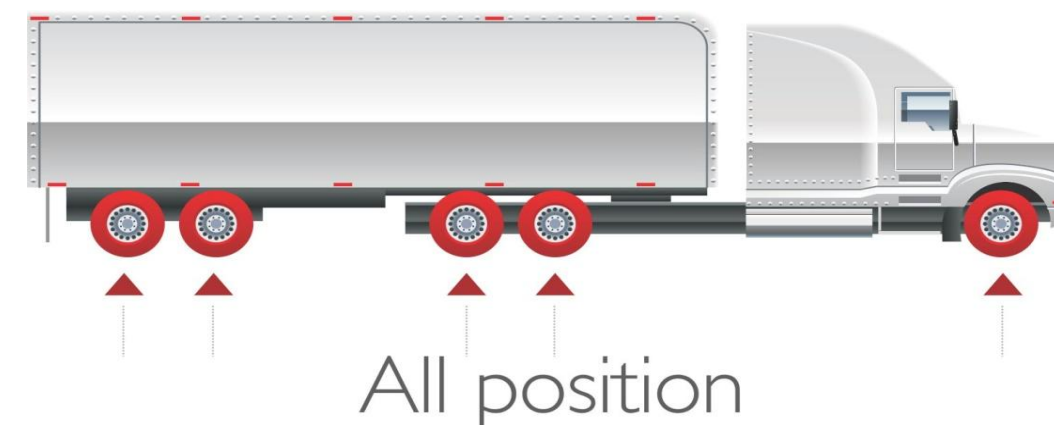

			(mm)	(mm)	single	dual	single	dual	(mm)			kg	label values			
SIZE	PLY RATING	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	MAX LOAD (KG)	MAX LOAD (KG)	PRESSURE (KPA)	PRESSURE (KPA)	TREAD DEPTH	LOAD AND SPEED INDEX	SECOND INDEX	WEIGHT	ROLLING RESISTANCE	WET GRIP	ROLLING NOISE	REMARK
385/65 R 22.5	18	11,75	385	1070	4250	---	830	---	17	158 L	160K	76,9	C	C	77)))	M + S
315/80 R 22.5	18	9,00	315	1085	3750	3450	830	830	18,5	154/150 M	156/150 L	69,0	D	C	77)))	M + S