




# HS 58

- ★ Drive position, for on/off road use
- ★ Suitable for poor road surface
- ★ Excellent grip and traction character
- ★ Low heat generating and good high speed driving character

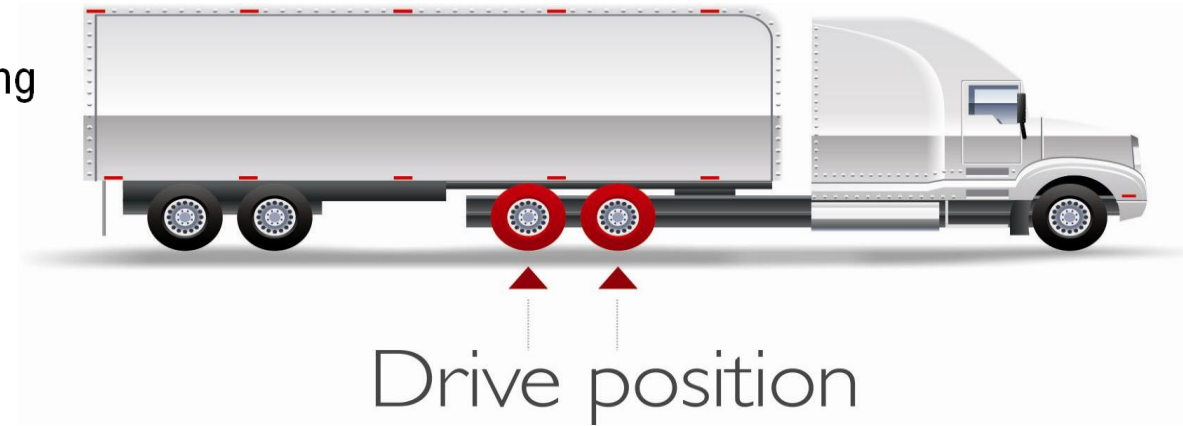

			(mm)	(mm)	single	dual	single	dual	(mm)			kg	label values			
SIZE	PLY RATING	STANDARD RIM	SECTION WIDTH	OVERALL DIAMETER	MAX LOAD (KG)	MAX LOAD (KG)	PRESSURE (KPA)	PRESSURE (KPA)	TREAD DEPTH	LOAD AND SPEED INDEX	SECOND INDEX	WEIGHT	ROLLING RESISTANCE	WET GRIP	ROLLING NOISE	REMARK
13 R 22.5	18	9,75	316	1140	3750	3450	830	830	24	154/151 K	156/150 G	77,0	D	C	77 )))	M + S
315/80 R 22.5	18	9,00	315	1094	3750	3450	830	830	23	156/150 K		71,9	D	C	77 )))	M + S
315/80 R 22.5	20	9,00	315	1094	4125	3750	900	900	23	157/154 K		74,0	D	C	77 )))	M + S
12 R 22.5	16	9,00	304	1091	3350	3075	830	830	23	149/145 K		69,0	D	C	77 )))	M + S
12 R 22.5	18	9,00	304	1091	3550	3250	930	930	23	152/149 K		69,0	D	C	77 )))	M + S